




## Shandong Zhongyue Precision Bearing C...

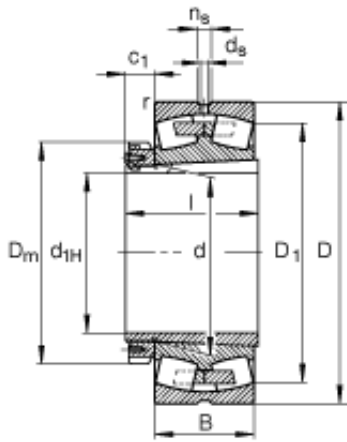

530 mm x 710 mm x 136 mm FAG 239/530-K-MB + H39/530-HG spherical roller bearings

Bearing No. 239/530-K-MB + H39/530-HG

239/530-K-MB + H39/530-HG Bearing 2D drawings and 3D CAD models

Size	500x710x136 mm
Bore Diameter	500 mm
Outer Diameter	710 mm
Width	136 mm
$d_{1H}$	500 mm
D	710 mm
B	136 mm
$B_{a \min}$	18 mm
c	68 mm
$c_1$	89 mm
$D_1$	656,5 mm
$D_{a \max}$	692 mm
$D_m$	630 mm
d	530 mm
$d_{a \max}$	576 mm
$d_{b \min}$	546 mm
$d_s$	12,5 mm
l	216 mm
$n_s$	23,5 mm
$r_{a \max}$	4 mm
$r_{\min}$	5 mm
- H39/530-HG / Adapter sleeve	H39/530HG / Adapter sleeve
m	146 kg / Weight



## Shandong Zhongyue Precision Bearing C...

$m_1$	89 kg
$C_r$	2850000 N / Dynamic load rating (radial)
$e$	0,18
$Y_1$	3,85
$Y_2$	5,73
$C_{0r}$	6800000 N / Static load rating (radial)
$Y_0$	3,76
$n_G$	930 1/min / Limiting speed
$n_B$	385000 N / Fatigue limit load, radial